


Aquarius Tank Alarms

Tank alarms come in two sizes:


TANK_ALARM_SM (500mm) complete with 3m suction tube, drum weight and 3m connection cable

TANK_ALARM_LG (1000mm) complete with 5m suction tube, drum weight and 5m connection cable.

1. Designed for simple installation. Simply cut or drill 25mm hole in the drum cap, mount the compression gland into the cap, insert the Tank Alarm through the bottom of the gland, adjust height to desired depth and tighten compression gland.
2. Tank Alarms can be configured for closed contact on empty (default) or open contact on empty. To change, remove circlip from bottom of Tank Alarm and reverse the float.

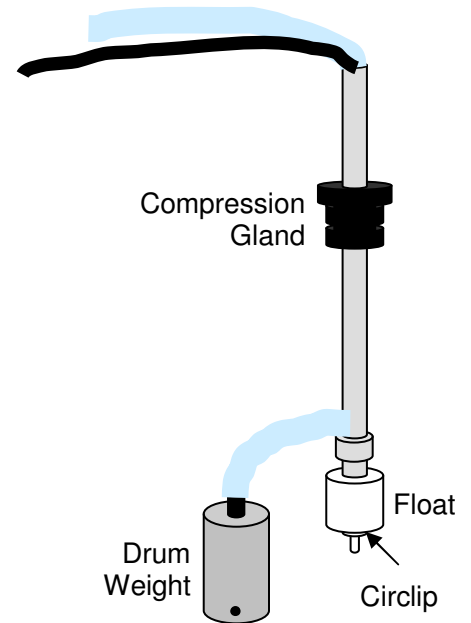

Wiring into Controller **Tank Alarm Box**

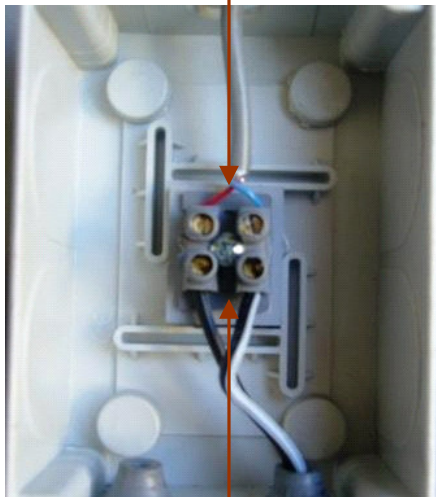

Wiring from
Tank Alarm

Wiring into Tank Alarm Box

Wiring into Controller



Terminals for Tank Alarm